



REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
A/0	2017.09.21	LM	NEW

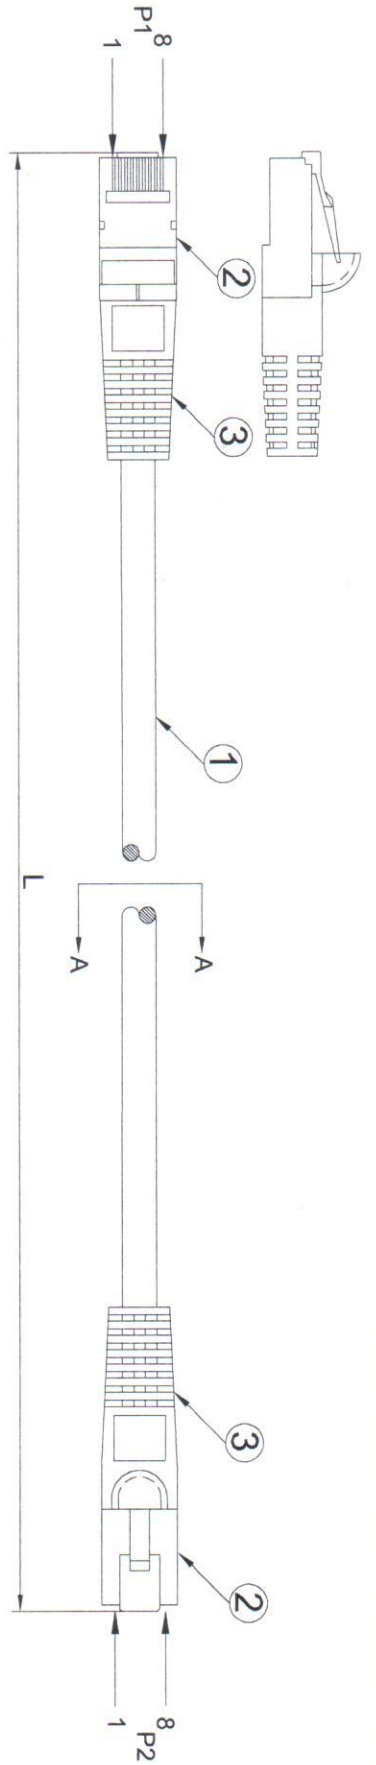

INK MARKING: CAT.6 26AWG4PR SSTP IEC 60332.1 PATCH CABLE - CONFORM TO ISO/IEC 11801 & EN 50288 & ANS/ITIA-568-C.2 3P/ETL VERIFIED ▲ CMX(U) C(U) CMH E164469-XX

conductor resistance: 152 Ω /Km at 20°C

Jacket Color
BK012
BU608
GN509
GY177
OR307
RD220
PU720
RD210
WH928
YE406



Conductor Color	Insulation Color
orange 1	green 2
white/orange	white/green
blue 3	brown 4
white/blue	white/brown

PINOUT	
P1	P2
1	WHITE/ORANGE
2	ORANGE
3	WHITE/GREEN
6	GREEN
4	BLUE
5	WHITE/BLUE
7	WHITE/BROWN
8	BROWN
shell	Braid
shell	shell

L(ft)	T(inch)	T(%)	L(ft)	T(inch)	T(%)
0.5	±0.6	10%	25	±4	1.33%
1	±1.2	10%	35	±6	1.43%
2	±1.2	5%	40	±6	1.25%
3	±1.2	3.33%	50	±6	1.0%
4	±1.2	2.5%	60	±6	0.83%
5	±1.2	2%	75	±6	0.67%
6	±1.2	1.67%	85	±6	0.59%
7	±2	2.38%	100	±6	0.5%
10	±2	1.67%	110	±6	0.45%
13	±2	1.28%	120	±6	0.42%
15	±3.15	1.75%	125	±6	0.4%
16	±3.15	1.64%	150	±6	0.33%
20	±4	1.67%	175	±6	0.29%
			200	±6	0.25%

③	MOLD	PVC YUS-07	2	PCS
②	PLUG	8P8C 50U RJ45 SHIELDED	2	PCS
①	CABLE	CAT.6 SSTP PVC 26AWG*4P BC	1	PC
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT