


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev. A/O	Rev. Date	Modified By	Brief Description
			NEW

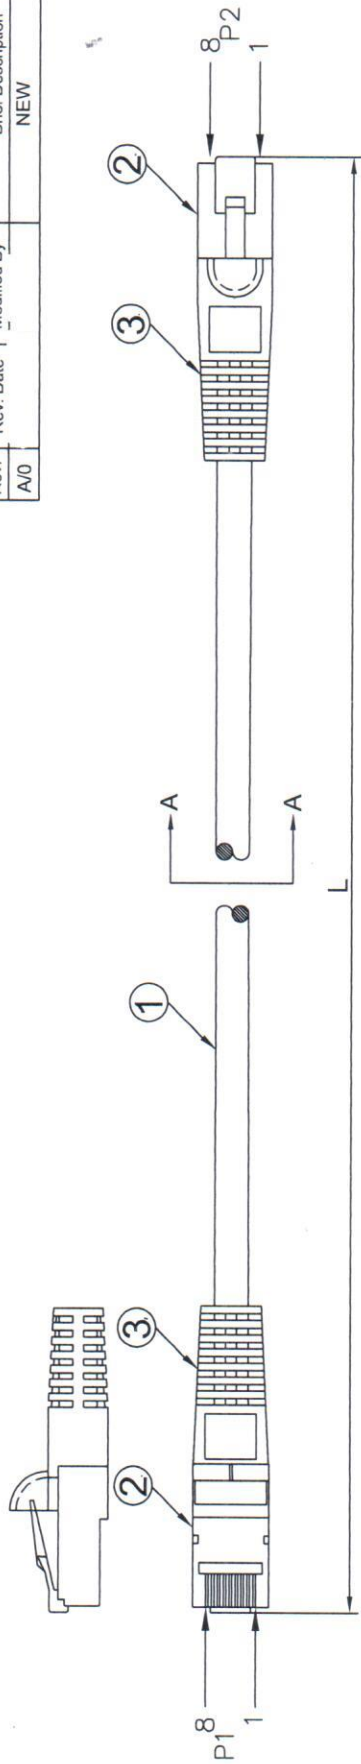

INK MARKING: CAT.6 26AWGX4PR SSTP IEC 60332.1 PATCH CABLE - CONFORM TO ISO/IEC 11801 & EN 50288 & ANSI/TIA-568-C.2 3P/ETL VERIFIED ▲ CMX(UL) C(UL) CMH E164469-XX

AL-MYLAR FOIL TAPE  
 INSULATION: FOAMED PE Thickness: 0.3±0.05MM  
 OD=1.08±0.05mm  
 JACKET: PVC Thickness: 0.55±0.1MM  
 OD=5.7±0.2mm  
 Braiding  
 CONDUCTOR: [26AWG(7/0.16±0.008mm) BC]X4P

Jacket Color
BK012
BU608
GN509
GY177
OR307
RD220
PU720
RD210
WH928
YE406

orange 1 white/orange	green 2 white/green
blue 3 white/blue	brown 4 white/brown

PINOUT	
P1	P2
1	WHITE/ORANGE
2	ORANGE
3	WHITE/GREEN
6	GREEN
4	BLUE
5	WHITE/BLUE
7	WHITE/BROWN
8	BROWN
shell	Braid

L(ft)	T(inch)	T(%)	L(ft)	T(inch)	T(%)
0.5	±0.6	10%	25	±4	1.33%
1	±1.2	10%	35	±6	1.43%
2	±1.2	5%	40	±6	1.25%
3	±1.2	3.33%	50	±6	1.0%
4	±1.2	2.5%	60	±6	0.83%
5	±1.2	2%	75	±6	0.67%
6	±1.2	1.67%	85	±6	0.59%
7	±2	2.38%	100	±6	0.5%
10	±2	1.67%	110	±6	0.45%
13	±2	1.28%	120	±6	0.42%
15	±3.15	1.75%	125	±6	0.4%
16	±3.15	1.64%	150	±6	0.33%
20	±4	1.67%	175	±6	0.29%
			200	±6	0.25%

2	PVC YUS-07	PLUG	3	
2	8P8C 50U RJ45 SHIELDED	PLUG	2	
1	CAT.6 SSTP PVC 26AWG*4P BC	CABLE	1	
QTY	SPECIFICATION	ITEM	NO.	

DATE:	DESCRIPTION: LAN PATCH C6 SSTP 26AWG 4P
SHEET 1 of 1	ITEM NO
SCALE 1:1	REV. 00
	UNIT:mm