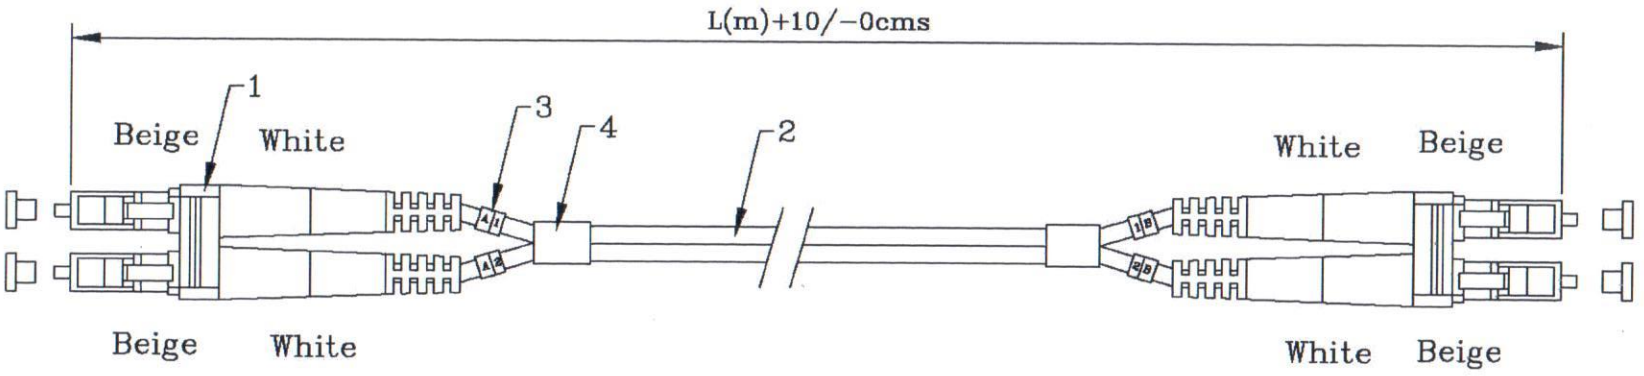

Features & Specification:

1.Low Insertion Loss: ≤0.3dB
2.Pre-radiused, PC-end finish for physical contact:R10 to 25mm
3.Repeatability(500 mating cycles): ≤0.2dB
4.Tensile Strength: ≧5KG
5.Exchangeability: ≤0.2dB
6.Operation Temperature: -20° C to +70° C
7.Storage Temperture: -40° C to +70° C
8.RoHS Compliant.
9.Standard product made on 3mm and 2mm PVC jacket(Also available for LSZH & plenum jacket).
10.Meet all international reliability standards.

NO	DESCRIPTION	Q'TY
4	Shrink Tube (RoHS Compliant)	2
3	Cable Marker (RoHS Compliant)	4
2	Fiber Cable: 50/125μm, OD 3mm or 2mm Jacket Color: Aqua(RoHS Compliant)	1
1	Connector Type: LC/PC Duplex MM White Boots (RoHS Compliant)	2SETS

DRAW:
CHEDKED:
APPROVED:

CUSTOMER:
PART NO:
TITLE: Fiber Patch Cord,Duplex,LC-LC
DRAW NO.:
REV. A
UNIT mm
SCALE 1:1
SHEET 1/1