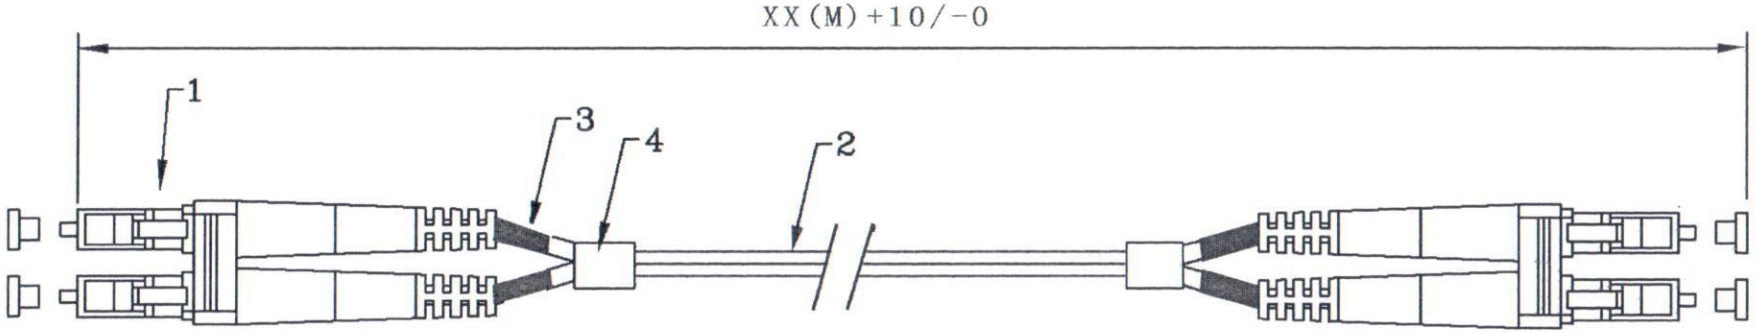

Features & Specification:

1.Low Insertion Loss: ≤0.3dB & Return Loss(>55dB)
2.Pre-radiused, PC-end finish for physical contact:R10 to 25mm
3.Repeatability(500 mating cycles): ≤0.2dB
4.Tensile Strength: ≧5KG
5.Exchangeability: ≤0.2dB
6.Operation Temperature: -20° C to +70° C
7.Storage Temperture: -40° C to +70° C
8.RoHS Compliant.
9.Standard product made on 2mm and PVC jacket(Also available for LSZH & plenum jacket).
10.Meet all international reliability standards.

NO	DESCRIPTION	Q'TY
4	Shrink Tube (RoHS Compliant)	2
3	Cable Marker (RoHS Compliant)	4
2	Fiber Cable: 9/125μm, OD2mm Jacket Color: Yellow(RoHS Compliant)	1
1	Connector Type: LC DUPLEX SM/LC DUPLEX SM(RoHS Compliant)	2SETS

DRAW:
CHEDKED:
APPROVED:

CUSTOMER:
PART NO:
TITLE: LC-LC DUPLEX SM
DRAW NO.:
REV. A
UNIT mm | SCALE 1:1 | SHEET 1/1