





NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD



REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
A/0	2014/9/12	Sally	NEW
A/1	2014/9/25	Sally	Change the color/date mark) Change ASSEMBLE to Non-Boot

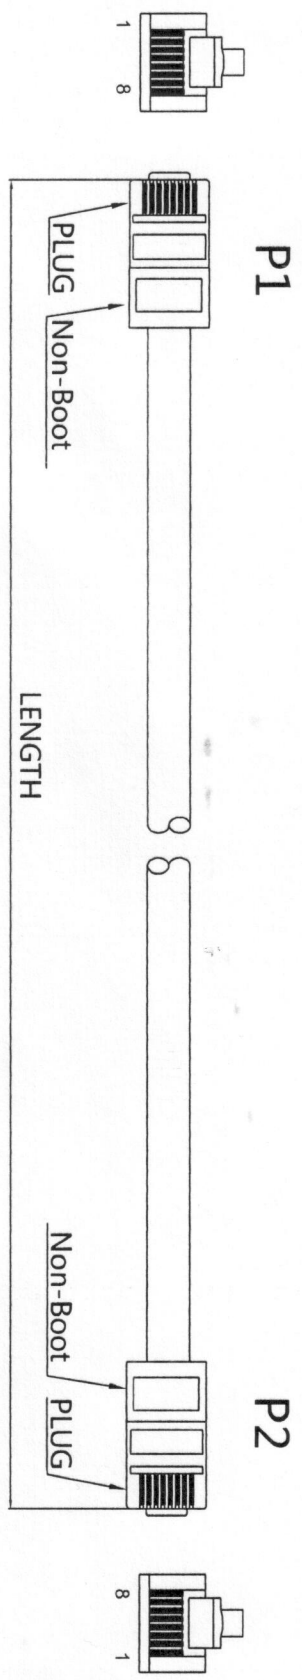

Marking: YFC CAT.6 UTP ISO/IEC 11801 & EN 50288 & ANSI/TIA-568-C.2 ETL/3P VERIFIED ▲ 24AWGX4P (FP0555) PATCH TYPE CMX (UL) c(UL) CMH E164469-F3

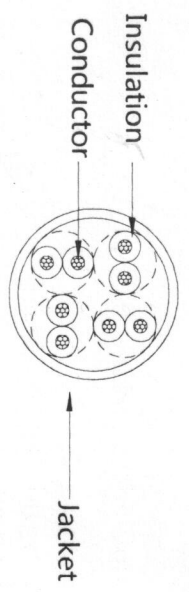

orange 2	green 3
white/orange	white/green
blue 1	brown 4
white/blue	white/brown

Conductor	Bare Copper 24AWG
Insulation	Thickness:MIN at any point:0.15mm MAX AVG:0.25mm
Jacket/PVC	Diameter:1.03±0.06mm Thickness:MIN at any point:0.60mm MAX AVG:0.70mm
Wire	Diameter:5.8±0.15mm
Plug	CAT.6 UTP 24AWG*4P
Color	8P8C 50u" green/black/blue/red/white/grey/ yellow/purple/orange
PAPT NAME	SPECIFICATION DESCRIPTION

PA/R	PINOUT		
	P1(T568B)	WIRE	P2(T568B)
2	1	WHT/ORG	1
2	2	ORG	2
3	3	WHT/GRN	3
3	6	GRN	6
1	4	BLU	4
1	5	WHT/BLU	5
4	7	WHT/BRN	7
4	8	BRN	8