



REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
A/0	2017.09.21	LM	NEW

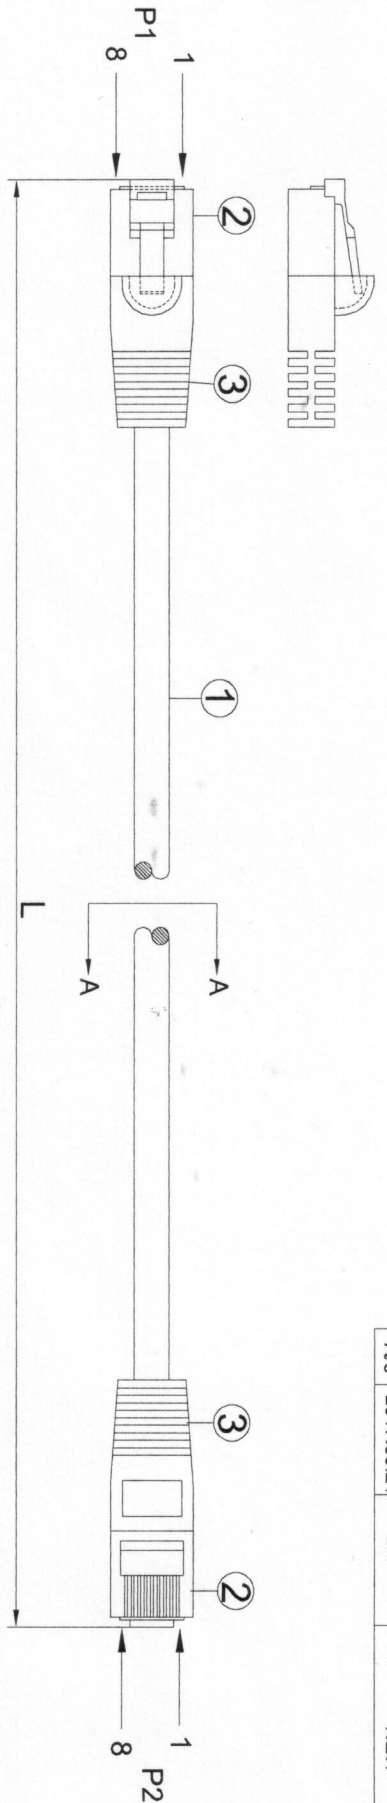

INK MARKING: YFC CAT 6 UTP ISO/IEC 11801 & EN 50288 & ANSI/TIA-568-C.2 ETL/3P VERIFIED ▲ 24AWGX4P PATCH TYPE
 CMX(UL) c(UL) CMH E164469-XX

conductor resistance: 120Ω/Km at 20°C

Jacket Color
BK012
BU608
GN509
GY177
OR307
RD220
PU720
RD210
WH928
YE406



INSULATION: HDPE Thickness: 0.2±0.05MM
 OD=0.9±0.05mm
 JACKET: PVC Thickness: 0.6±0.1MM
 OD=5.3±0.5mm
 CONDUCTOR: [24AWG(7/0.175±0.008mm) BC]X4P

PINOUT	
P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8

L(ft)	T(inch)	T(%)	L(ft)	T(inch)	T(%)
0.5	±0.6	10%	15	±3.15	1.75%
1	±1.2	10%	20	±4	1.67%
1.5	±1.2	6.67%	25	±4	1.33%
2	±1.2	5%	30	±6	1.67%
3	±1.2	3.33%	35	±6	1.43%
4	±1.2	2.5%	40	±6	1.25%
5	±1.2	2%	50	±6	1.0%
6	±1.2	1.67%	75	±6	0.67%
7	±2	2.38%	100	±6	0.5%
8	±2	2.08%	125	±6	0.4%
9	±2	1.85%	150	±6	0.33%
10	±2	1.67%	175	±6	0.29%
12	±2	1.39%	200	±6	0.25%

NO.	MOLD	PART NAME	DESCRIPTION	QTY	UNIT
③	MOLD		PVC YU-19	2	PCS
②	PLUG		8P8C 50U RJ45	2	PCS
①	CABLE		CAT 6 UTP PVC 24AWG*4P BC	1	PC
			SPECIFICATION DESCRIPTION		