


Conductor	Bare Copper 24AWG
Insulation	Thickness: MIN at any point: 0.15mm MAX AVG: 0.25mm Diameter: 0.98 ± 0.06mm Thickness: MIN at any point: 0.42mm MAX AVG: 0.48mm
Jacket/PVC	Diameter: 5.3 ± 0.15mm
Wire	CAT. 5E UTP Stranded 24AWG*4P
Plug	8P8C 50u"
Color	green/black/blue/red/white/grey/ yellow/purple/orange
PART NAME	SPECIFICATION DESCRIPTION

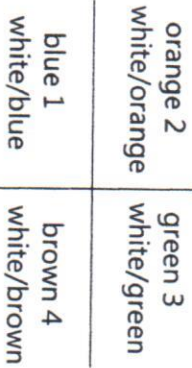

PAIR	P1 (T568B)	WIRE	P2 (T568B)
1	1	WHT/ORG	1
2	2	ORG	2
3	3	WHT/GRN	3
4	4	BLU	4
5	5	WHT/BLU	5
6	6	GRN	6
7	7	WHT/BRN	7
8	8	BRN	8

Length (ft)	Tolerance (±)	Tolerance (inch)	Tolerance (ft)	Length (ft)	Tolerance (±)	Tolerance (inch)	Tolerance (ft)
0.5	0.6	10.00%	15	3.15	1.25%		
1	1.2	10.00%	20	4	1.67%		
1.5	1.2	6.67%	25	4	1.33%		
2	1.2	5.00%	30	6	1.67%		
3	1.2	3.33%	35	6	1.43%		
4	1.2	2.50%	40	6	1.25%		
5	1.2	2.00%	50	6	1.00%		
6	1.2	1.67%	75	6	0.67%		
7	2	2.38%	100	6	0.50%		
8	2	2.08%	125	6	0.40%		
9	2	1.85%	150	6	0.33%		
10	2	1.67%	175	6	0.29%		
12	2	1.39%	200	6	0.25%		

CABLES.COM
800 372-3725
MORE COLORS OPTIONS AVAILABLE