

CAT6 23AWG/4PAIR 550MHz DIRECT BURIAL WATERBLOCK TAPE SHIELDED F/UTP

PART NO. 6OUTWSHDB

DESCRIPTION

- 23 AWG 4 Pair F/UTP Category 6 cable tested to 550Mhz premium grade, high performance for top level network cabling for maximum headroom and bandwidth. Available in wood reel for easier installation.

FEATURES AND BENEFITS

- Cross web filler for enhanced performance
- Rugged jacket for outside plant applications
- UV resistant polyethylene jacket
- Water blocking tape
- Sequential footage markings
- Verified by third-party for guaranteed performance


APPLICATIONS

- IEEE 802.3 1000Base-T, 100Base-Tx
10Base-T, PoE+
- ANSI/TIA 854: 1000Base-TX
- CDDI, Token Ring, ATM
- Digital Video
- Broadband and Baseband Analog Video

STANDARD COMPLIANCES

- ANSI/TIA 568-C.2
- ANSI/TIA 862 (Building Automation)
- ISO/IEC 11801 Ed. 2.0 (Class EI)
- ICEA 8-102-700 (Category 6 or 5E)
- EC Verified (Certified by DELTA)
- REACH Compliant
- CPR Compliant (Fully Comply to 305/2011 & EN 50575:2014-09)
- RoHS Compliant Directive 2002/95/EG

Toll Free: (866) 945-5051
Local: (770) 945-5051
Fax: (770) 945-9582
www.commoditycables.com

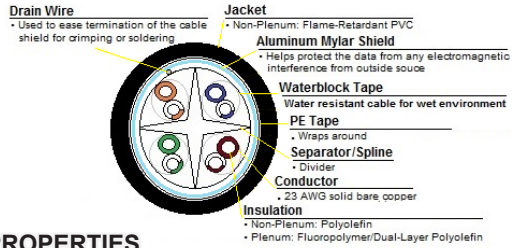

PHYSICAL PROPERTIES

Conductor	Material	Bare copper
	Nominal O.D (mm)	0.57
Insulation	Material	HDPE
	Diameter (± 0.05mm)	1.12
Screen Material		AL-FOIL
Cunstruction		Direct Burial/Waterblock Tape/Shielded
Jacket	Thickness (mm)	0.60±0.05
	External O.D (mm)	7.8±0.5
	Surface	Smooth
	Material	LLDPE
	Color	Black
Rip Cord:		Yes
Drain Wire:		1/0.4mm TC
Surface Printing	Letter Height (mm)	3.0±0.3
	Color	White
	Print Error & Space	≤±0.5%, 2ft
Packing	Length	1000ft ± 4ft
	Weight	41 lbs/Reel
Voltage Rating (Max)		DC 300V



ELECTRICAL CHARACTERISTICS

1.0 - 250.0MHz characteristic impedance (ohms)		100±15
250.0 - 600.0MHz characteristic impedance (ohms)		100±25
1.0 - 350.0MHz Delay Skew (ns/100m)		≤45
Pair - To - Ground Capacitance Unbalance (pF/100m)		≤330
Max. Conductor DC Resistance 20°C (ohms/100m)		9.38
Resistance Unbalance (%)		≤5
NVP		68%
Before Aging	Tensile Strength (Mpa)	≥10
	Elongation (%)	≥350
After Aging	Tensile Strength (Mpa)	-
	Elongation (%)	≥300
Aging Period (°C x hrs)		100°C x 24h x 10d
Cold Bend (No Visible Crack)		-40±2°C
Temperature Range		-40°C ~ +75°C
Velocity of Propagation (%)		68



1000' Wood Reel
Weight: 41 lbs.

AVAILABLE CATEGORY 6 (PART NUMBERS)

PVC	Plenum	Shielded	Shielded Plenum	Direct Burial	Shielded Direct Burial
6CMR244Bx	6CMP234Bx	6SHDCMRRx	6SHDCMPRx	6OUT234RB	6OUTGSHDRB
6CMR234Bx				6OUTG234RB	6OUTWSHDB
				6OUTW234RB	
				6OUTA234RB	

*All values in this specification are nominal and are subjective to tolerances of +/- 10 to 15%.
It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice*

ELECTRICAL PERFORMANCE

ACRF - Attenuation to Crosstalk Ratio - Far End (dB/100m)

NEXT - Near End Crosstalk (dB/100m)

ACR - Attenuation to Crosstalk Ratio (dB/100m)

PSNEXT - Power Sum Near End Crosstalk (dB/100m)

ELFEXT - Equal Level Far End Crosstalk (dB/100m)

PSELFEXT - Power Sum Equal Level Far End Crosstalk (dB/100m)

RL - Return Loss (dB)

TCL - Transverse Conversion Loss (dB/100m)

ATT - Attenuation (dB/100m)

FREQUENCY (MHz)	ATT (dB/100m)	RL (dB)	ACR (dB)	Next (dB)	PSNEXT (dB)	TCL (dB/100m)	PHASE DELAY	ELFEXT (dB/100m)	PSELFEXT dB/100m)
0.772	1.8	20	74.2	76.0	74.0	40.0	-	-	-
1	2.0	21	72.3	74.3	72.3	40.0	570.0	67.8	64.8
4	3.8	23.4	61.5	65.3	63.3	40.0	552.0	55.7	52.8
8	5.3	24.6	55.4	60.8	58.8	40.0	546.7	49.7	46.7
10	6.0	25	53.3	59.3	57.3	40.0	545.4	47.8	44.8
16	7.6	25	48.6	56.2	54.2	38.0	543.0	43.7	40.7
20	8.5	25	46.2	54.8	52.8	37.0	542.1	41.7	38.8
25	9.5	24.3	43.7	53.3	51.3	36.0	541.2	39.8	36.8
31.25	10.7	23.6	41.1	51.9	49.9	35.1	540.4	37.9	34.8
62.5	15.7	21.5	31.7	47.4	45.4	32.0	538.6	31.8	28.9
100	19.8	20.1	24.1	44.3	42.3	30.0	537.6	27.8	24.8
200	29.0	18	10.0	39.8	37.8	27.0	536.5	21.8	18.8
250	32.8	17.3	4.6	38.3	36.3	26.0	536.3	19.8	16.8
300	36.4	16.8	0.7	37.1	35.1	-	536.1	18.3	15.3
350	39.8	16.3	-	36.1	34.1	-	535.9	16.9	13.9
400	43.0	15.9	-	35.3	33.3	-	535.8	15.8	12.8
500	48.9	15.2	-	33.8	31.8	-	535.6	13.8	10.8
550	51.8	14.9	-	33.2	31.2	-	535.5	13.0	10.0

Electrical performance with frequency over 250MHz is only for reference

AVAILABLE JACKET COLORS

STANDARD	BLACK	
SPECIAL	Per Customer Request*	
INSULATION COLORS		
PAIR 1	BLUE	WHITE
PAIR 2	ORANGE	WHITE
PAIR 3	GREEN	WHITE
PAIR 4	BROWN	WHITE

JACKETS ABBREVIATION

Black	B	Last alphabetical character of each part number indicates the color code that the Jacket is available in. For example Part # 6CMR244Bx ("x" indicates all the colors to the left are available for this product.
White	W	
Gray	G	
Blue	O	
Yellow	Y	
Green	V	
Orange	OR	
Purple	P	
Red	R	
Pink	PI	

Toll Free: (866) 945-5051
Local: (770) 945-5051
Fax: (770) 945-9582
www.commoditycables.com



*All values in this specification are nominal and are subjective to tolerances of +/- 10 to 15%.

It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice*